

Joyfirst
Powered by RQccer

FORTLAMPS

Joyfirst
Powered by RQccer

JTL Studio Systems Inc.

ФОРТЛАМПЪ

www.fortlamps.ru +7495 749 66 09 info@fortlamps.ru



PRODUCT CATALOGUE

LED 100W MINI MOVING HEAD SPOT LIGHT



DMX 512
18 CH



oyfirst

JT-D100S

JT-D100S

Product Specification:

Power supply: AC 100~240V 50-60Hz

Power Consumption: 200W

Light source 1: 1 pc 100W LED

Light source 2: 12 pcs RGB 3 in 1 SMD 5050 LED

Color: 7 colors + white

Prism: 3 facet prism

Pattern 1: 7 patterns + white

Pattern 2: 1 white light + 6 rotating patterns
(4 glass + 2 metal)


Control mode: DMX512/Auto/Sound/Master-slave

Produce size: 200 x 250 x 380 mm

Package size: 280 x 330 x 410 mm

Net weight: 6 kgs



Gross weight: 7.5 kgs

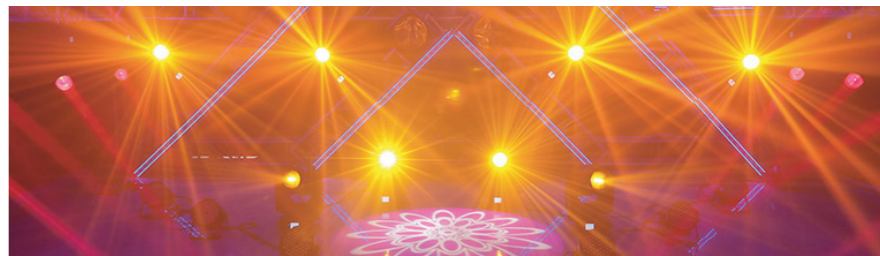

Dimensions:



Gobo&Color:

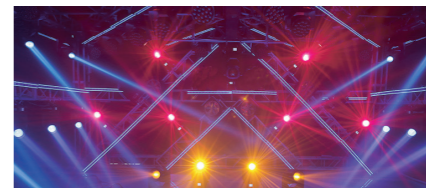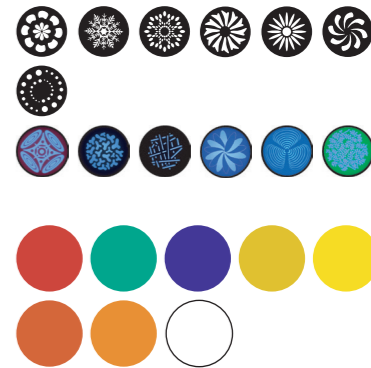

LED 100W MINI MOVING HEAD BEAM LIGHT



DMX 512
16/18 CH



joyfirst

JT-D100B



JT-D100B

Product Specification:

Light Source: 1x100W LED+30x0.2W RGB 3in1
(light strip)

Control Mode: DMX512, master-slave,
self-propelled, voice control

Channel: 16/18CH

Color Wheel: 15+white

Pattern Wheel: 17+white

Prism Wheel: 6+12 facet rotation prism

Zoom: Yes

Strobe: Yes

X axis: 540°

Y axis: 270°

Dimming: 0-100% linear dimming

Packing Dimension: 410mm*280mm*330mm

Packing Dimension: 580mm*430mm*350mm(2in1)

Net Weight: 7.5KG


Gross Weight: 9KG



Dimensions:



Gobo&Color:

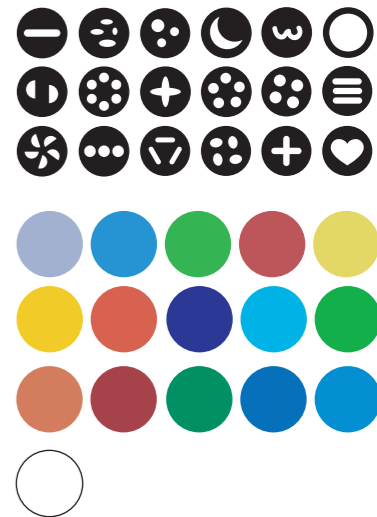

7R 230W MINI BEAM MOVING HEAD LIGHT

DMX 512
16CH



oyfirst

JT-R230BM



JT-R230BM

Product Specification:

Power supply:AC 100-240V,50/60HZ

Power consumption:300W

Lamp source:ROCCER RSD 230W R7

Color temperature:8000K

Ballast:Electronic ballast

Life:2000hrs

Color wheel:14 colors,with rainbow effect

Gobo Wheel:12 fixed gobos +
3 glass gobos + blank

Prism:One (8+16+24) prism

Dimming:0-100% linear dimming

Strobe:double lens strobe
(0.5-9 times/second)

Scan:X axis 540° ,Y axis 270° ,
automatically accurate positioning

Beam angle:2.5°

Channel Control:DMX512

Channel:16CH

Display:LCD display

IP rating:IP20


Cooling:Forced ventilation with axial fans

Product size:235 × 316.8x519mm


Net Weight:12.5kg




Dimensions:

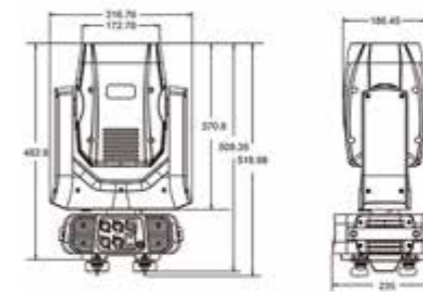

Gobo&Color:

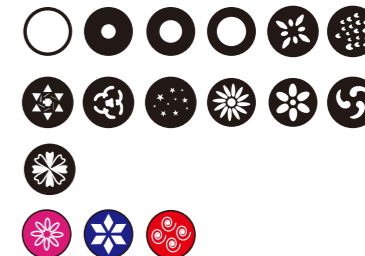

Photometric Data:

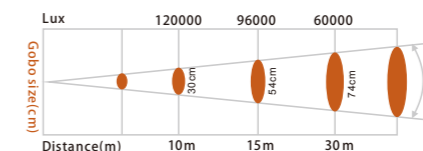

10R 260W BEAM MOVING HEAD LIGHT

DMX 512
18 CH



joyfirst

JT-R260B



JT-R260B

Product Specification:

Light source: 260W Osram lamp burner, equipped with Osram ballast
Color temperature: 7500k
Channel mode: 18 DMX512 Channel
Pan scan: 540°(16bit) electric correction
Tilt scan: 270° (16bit) electric correction
Color wheel: 14colors + white, with rainbow
Gobo wheel: 14 gobos
(8 fixed gobos + 5 glass gobos + white);
Effect Wheel: 8 prism/8+16prism
Dimming: 0-100% mechanical dimming and free dimming
Beam angle: 2°
Power Input: 100-240V, 50/60Hz
Power Dissipation: 400W
IP level : IP20 Magnetic ballast and AC/Dc power supply
Product Size: 310×230×500mm
Packing Size: 395X370X520mm
Net weight: 13.1KG



Dimensions:



Gobo&Color:



10R 280W PRISM KING MOVING HEAD

DMX 512
18CH



IP-20

joyfirst

JT-R280BP



JT-R280BP

Product Specification:


Lamp: Roccer 280W
 Voltage: AC110-240V/50-60Hz
 Ballast: Electronic ballast
 Rated Power: 300W
 Beam Angle: 1.6 degree
 IP rating: IP 20
 Lens diameter: 145mm
 Channel mode: 18 DMX512 Channel
 Pan/Tilt: 540/270 degrees, 8/16 bit resolution
 Color wheel: 13 colors+white, with uv
 Gobo Wheel: 8 xed gobos+3 glass gobos+blank
 Prism: 6 prisms: 32 facet prism; 16 facet prism;
 8+16+24 facet prism; 6+12 facet prism;
 2 linear prisms
 Dimming: 0-100% linear dimming
 Strobe: 0.5-14 t/s
 Effects: frost, water-fog, rainbow
 Product Size: 440x410x540mm
 Net weight: 18kg
 Flight Case size: 800x400x600mm(2in1)
 Gross weight: 52kg(with 2in1 flight case)




Dimensions:



Gobo&Prism&Color:

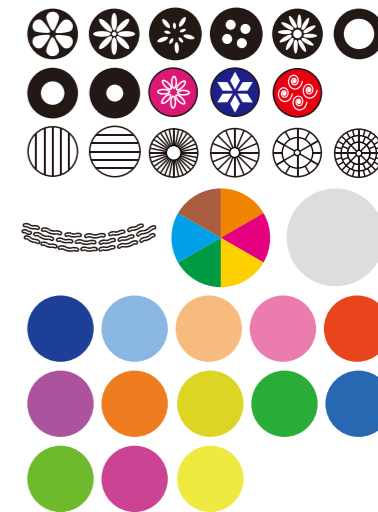

Photometric Data:

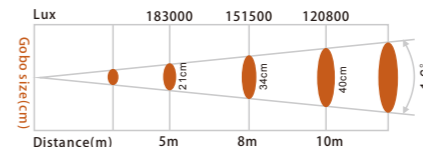

14R 295W PRISM KING BEAM MOVING HEAD LIGHT

DMX 512
18 CH




oyfirst
JT-R295BP



JT-R295BP

Product Specification:


Lamp: Roccer 295W
Voltage: 450W
Beam Angle: 1.8°
IP rating: IP20
Lens diameter: 145mm
Protocols: DMX512, RDM
Channel mode: 18 DMX512 Channel
Pan/Tilt: 540°/270°, 8/16 bit resolution
Fixation: Tilt lock
Correction: Automatic Pan/Tilt position correction
Color wheel: 14 colors+open, with uv
Gobo Wheel: 8 fixed gobos+5 glass gobos+open
Thickness: 1mm
Prism: 6 prisms: 8 facet prism; 16 facet prism;
8+16+24 facet prism; 6+12 facet prism;
2 linear prisms
Dimming: 0-100% linear dimming
Strobe: 0.5-14 t/s
Effects: frost, water-flow, rainbow
Product Size: 310x210x520mm
Net weight: 16kg
Gross Weight: 19.5kg
Package Size: 470x400x580mm
Flight Case size: 730x450x720mm(2in1)
Gross weight: 57kg(with 2in1 flight case)

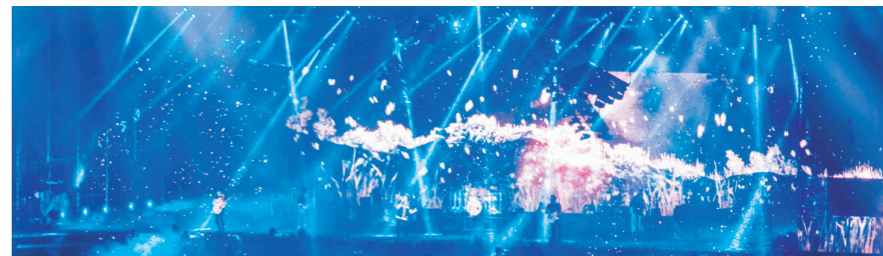

Dimensions:



Gobo&Color:

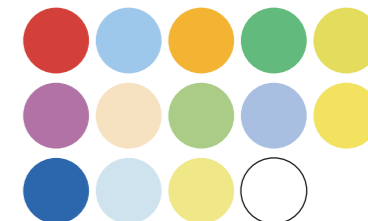

380W/450W BEAM MOVING HEAD

DMX 512
18CH



IP-20

oyfirst

JT-R380B

JT-R450B



JT-R380B/JT-R450B

Product Specification:

Lamp: RSD 380W/450W
 Channel mode: 18 DMX512 Channel
 Pan scan: 540° (16bit) Electric correction
 Tilt scan: 270° (16bit) Electric correction
 Amazing dot matrix, four tact switch,
 180° turning show
 Color wheel: one color wheel, 13 kinds of
 color chips in one color wheel
 Gobo: 14 gobos
 Effect Wheel: Rotation six prisms,
 effect move, frost
 Prism 1:
 16 facet Prism+6 linear prism+(6+12) prism
 prism 2:
 32 facet prism+6 linear prism+(8+16+24) prism
 0-100% mechanical dimming, mechanical
 dimming and free dimming available
 strobe macro control available.
 Lens optical system achanical focuse .
 beam angle 2°
 Over heat protection
 Power Input: 100-240V, 50/60Hz
 Power Dissipation : 550W
 IP level : IP20
 Magnetic ballast and AC/DC power supply
 Product Size : 400*260*600mm
 Net weight : 24KG




Dimensions:



Gobo&Color:



Photometric Data:

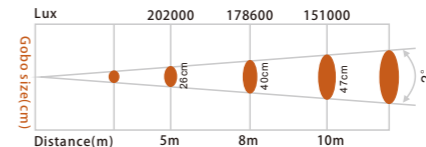

380W/450W 3 IN 1 MOVING HEAD LIGHT

DMX 512
26/30CH



oyfirst

JT-R380BSW
JT-R450BSW



JT-R380BSW/JT-R450BSW

Product Specification:


Light source: **RSD 380W/450W**
 Max Power: 600-800W
 Power: 100-240v 50-60Hz
 Color temperature: 6500k-8000k
 Lamp lifespan: 1500 hours
 Flare Angle: 2-50°
 Software upgrade: Upgrade the software conveniently&fast by DMX data line
 RDM function: Can be correct DMX address mode by Controller, Channel mode function can be matched Artnet function.
 Control method: DMX512, Auto, Master-Slave
 Channel mode: 26CH/30CH
 X/Y Sc n: Pan 540° , Tilt: 270°
 Color wheel: 13 colors+white, rainbow effect, can be located randomly
 Rotating gobo wheel: 7 Pluggable gobos, Gobo rotating, gobo watering effect
 Rotating gobo auto: can be located randomly
 Fixed gobo: 14 fixed gobo, shake watering effect
 Dynamic effect wheel: A independent effect wheel can be realized waterwave, flaming, starry effect
 Six color wheel: One independent six colorful wheel, can be realized gobo rainbow effect
 Atomizing mirror: atomizing soft-light mirror
 Dimmer: 0-100% linear
 Dimming flash: Synchronous pulse
 Prism wheel 1: 8 prisms, both-directional rotating effect
 Prism wheel 2: 16 prisms, both-directional rotating effect, Can choose 6 row mirror prisms
 Focus: Prism can be zoom independently, realize more abundant prism effect
 Focus: Gobo can be adjust distinctness randomly
 Magnify: Flare can be adjust to 3-50 degrees
 Display: 2.8inch touch colorful LED dispaly, display Chinese and English, can be upside-down display





Dimensions:



Gobo&Color:




Photometric Data:

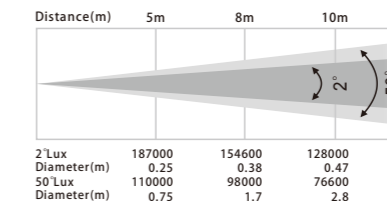

BEAM, SPOT, WASH 3 IN 1 LED MOVING HEAD



DMX 512
17/20CH

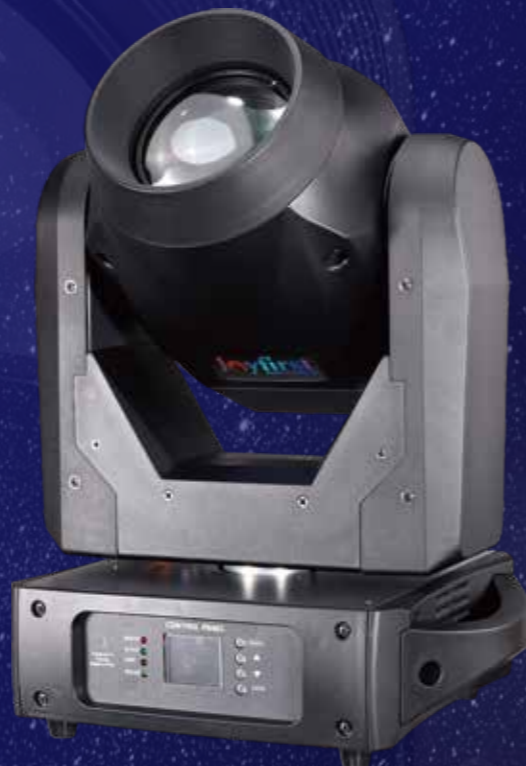

JYfirst

JT-D150BSW

JT-D150BSW

Product Specification:

Power supply: AC100~240V 50/60Hz
 Power consumption: 189w
 Light source: 1*150w LED
 Angle: Beam angle: 11° (on full open)
 2°/4°/6°/8°/10°(with beam reducer) 3°/6°/
 9°/12°/15°/20°(with zoom lens) Spot angle:
 Fix gobo: 2°-15° (with zoom lens) Rotating
 gobo: 10°-17° (with zoom lens)
 Wash angle: 15°-28°
 Movement: Pan: 540° tilt: 270°
 Dimmer: 0-100% smooth dimming
 Color wheel: 8 fixed colors plus white,
 Rainbow effect in both directions
 Gobo wheel: 1 static gobo wheel with 7 gobos
 plus open, 1 rotating gobo wheel with 6
 gobos plus open
 prism: 3 facet prism rotating in both directions
 Frost: independent frost effect
 Focus: Motorized focus
 Zoom: Motorized linear zoom system
 Protocols: DMX512 Data input/output,
 3/5 pin XLR socket
 Weight: 12kg
 Dimension: 452*290*256mm




Dimensions:



Gobo&Color:



Photometric Data:

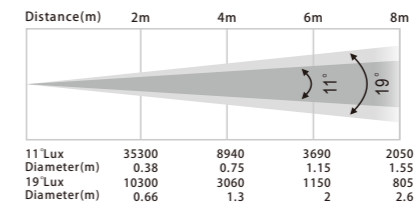

7X40W RGBW LED ZOOM MOVING HEAD



JT-D740WS

Light Source

7 pieces 40W RGBW LED
Beam Angle: 6.5°-55°
Power Consumption: 300W
Power Voltage: AC 100-260V, 50/60Hz

Control

DMX Channel: 17 Channel
Control Modes: DMX512/Auto-Run/
Master-Slaver/Sound

Pan/Tilt

Pan/Tilt: 540°/270°
Pan/Tilt Resolution: 16 bit

Construction

Display: 180° reversible LCD colorful Display
Data In/Out socket: 3-pin & 5-pin XLR sockets
Power Socket: PowerCon in & out
Protection Rating: IP20
2 pieces omega quick lock system bracket
Pan & Tilt: 3 phase motors
safety eye equipped

Features

Dimmer: 0-100% smooth dimming
Fast, quiet operation and flicker free
Smooth zoom curve
Dimmer frequency: 2000 HZ

Dimension

Dimension: 291*231*416mm;
NW: 10.5KGS
Package size: 35x28.5x52cm (1pc/ctn); GW: 12KGS
60x37x55cm (2pcs/ctn); GW: 25KGS

12X40W ZOOM MOVING HEAD



JT-D1240WS

Light Source

19 pieces 15W RGBW LED
Beam Angle: 6.5°-60°
Power Consumption: 300W
Power Voltage: AC 100-260V, 50/60Hz

Control

DMX Channel: 20/28 Channel
Control Modes: DMX512/Auto-Run/
Master-Slaver/Sound

Pan/Tilt

Pan/Tilt: 540°/220°
Pan/Tilt Resolution: 16 bit

Construction

Display: LCD Display
Data In/Out socket: 3-pin & 5-pin XLR sockets
Power Socket: PowerCon in & out
Protection Rating: IP20
1 pieces quick lock system bracket

Features

Dimmer: 0-100% smooth dimming
Fast, quiet operation and flicker free
Smooth zoom curve
Three section, led circle control
Dimmer frequency: 1200 HZ

Dimension

Dimension: 33*23*37cm; NW: 10 KGS
Carton Package: 41x33x49 cm (1pc/ctn); GW: 12 KGS
Flight case: 72x42x63 cm (2pcs/case); GW: 42 kgs
Flight case: 87x61x63 cm (4Pcs/Case); GW: 75 Kgs

4X12W LED MINI BATTERY PAR LIGHT



JT-412BP

Rated voltage: 90V-240VAC, 50/60Hz
 Power Consumption: 55W
 LEDs: 4PCS* 12 W RGBWAUV (6 in 1) LEDs
 Lamp rated life: >50000 Hours
 Beam angle: 40 degree
 DMX512 Channels: 6/10 CH
 Dimming: 0-100%
 with wireless DMX & IR remote control
 Strobe: Independent electronic strobe,
 0-20 times / second,
 the speed can be adjusted
 Battery working time: (+/-) 4 hours Full color,
 (+/-) 15 hours single color or auto run
 Control Mode: Wireless DMX control ,
 IR remote control , DMX512 control ,
 Auto Run, Master /Slave, Sound Active
 Product size: 130 x 130 x 122 mm
 Inner box size: 180 x 175 x 200 mm
 Master box size: 380 x 375 x 430 mm
 (8 Lights/box)
 Net Weight: 1.9 kgs
 Gross Weight: 2.5 kgs



6X12W LED MINI BATTERY PAR LIGHT



JT-612BP

Rated voltage: 90V-240VAC, 50/60Hz
 Power Consumption: 80W
 LEDs: 6PCS* 12 W RGBWAUV (6 in 1) LEDs
 Lamp rated life: >50000 Hours
 Beam angle: 40 degree
 DMX512 Channels: 6/10 CH
 Dimming: 0-100%
 with wireless DMX & IR remote control
 Strobe: Independent electronic strobe,
 0-20 times / second,
 the speed can be adjusted
 Battery working time: (+/-) 4 hours Full color,
 (+/-) 15 hours single color or auto run
 Control Mode: Wireless DMX control ,
 IR remote control , DMX512 control ,
 Auto Run, Master /Slave, Sound Active
 Product size: 130 x 130 x 122 mm
 Inner box size: 180 x 175 x 200 mm
 Master box size: 380 x 375 x 430 mm
 (8 Lights/box)
 Net Weight: 1.9 kgs
 Gross Weight: 2.5 kgs



8 PCS FAT BEAM LED STAGE PARTY LASER LIGHT



JT-LAB508R

Power Supply: AC100-240V 50-60Hz
Power Consumption: 68W
Total Laser Power: 4W red
Laser Power/ Wavelength: 8pcs 500mW 638nm red
Scan System: Step motor
Scanning Angle: 180°
Modulation: TTL
Control Mode: DMX/Atuo/Sound/Mater-Slave
DMX Channel: 7/16CH
LED Power: 7x3W Amber LED(beam angle 7°)
Laser Safety: Class 3
Display: LED display with 4 buttons
IP Rating: IP20
N.W: 6.8KG
G.W: 7.3KG
Product Dimension: 1000x84x173mm
Carton Size: 1220x360x250mm(2pcs carton)

6 PCS BIAX OUTDOOR MOVING HEAD SPIDER LASER LIGHT



JT-LAB506RGB

Power Supply: AC100-230V 50-60Hz ± 10%
Power Consumption:300W
Laser Power:3000mW RGB (500mWRGB*6PCS)
Laser colors: RGB full colors
Scanner angle:Y:180 deg ree,X:120 degree
Control signal:DMX-512 standard signal
DMX channel:13/73CH
Laser Safety: Class 3B
Control Mode:DMX512,music control,automatic, master&slave
Operating environment:indoor
Display: LED display with 4 buttons
IP Rating: IP20
N.W: 12.9 KG
G.W: 15.1 KG
Product Dimension: 1000x129x230m m
Carton Size: 1240x460x330m m(2pcs/carton)
G.W.:34.2 KG


44X10W LED OUTDOOR WASH MOVING LIGHT



JT-D4410W

LED Type: 10W RGBW 4in1 LEDs
Mains voltage: 100-240V AC / 50-60Hz
Power: 400W
LED Count: 44
LED Colors: RGBW
Resolution: 8-16 Bit
Tilt (Degrees): 185°
Control Modes: 7CH / 7CH (CTC) / 9CH / 11CH (CTC)
Protocol: USITT DMX-512, RDM
RDM: Bidirectional communication
Dimmer: 0-100% electronic
Shutter: electronic, max. 17 Hz
Color temperature filter: electronic,
2.000 K - 10.000 K
Maximum ambient temperature: -30° C / 86° F,
50° C / 122° F
Length: 482 mm / 18.9 in
Width: 178 mm / 9.0 in
Height (head horizontal): 243 mm / 9.5 in
N.W: 10 kg
G.W: 12.5 kg

7X15W MINI WATERPROOF LED PAR LIGHT

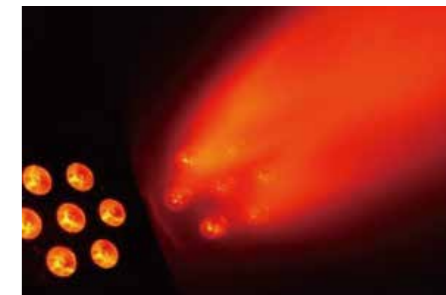

JT-D715P

MINI 7PCS Waterproof LED Par Light
Voltage: AC110-240V, 50/60Hz
Power: 95W
LED: 7x15w RGBWAUV leds
Color: RGBWAUV color mixing
Beam Angle: 45°
Channel: 6/10CH
IP rating: IP20/IP65
N.W: 3kg
G.W: 4kg

ACCESSORIES

LIGHT BULB



7R



15R



17R



20R



RSD300W



HPL750



RSD2500



RSD575

ACCESSORIES

POWER CORD/LIGHT HOOK

